

XEROX[®] PRIMELINK[®] PRINTER

The world's #1* entry production color printer just got even better.



C9065 AND C9070

Xerox® PrimeLink® C9065 and C9070 Printer

The Xerox® PrimeLink® C9065/C9070 delivers the most adaptable capabilities on the market. From superior image quality and unmatched media flexibility to professional-grade finishing, automation and security, it takes entry level to the next level.



IMPROVE YOUR IMAGE

Entry-level price point shouldn't mean entry-level image quality. With PrimeLink, you can deliver stunning output on every job, every time.

It all starts with resolution. 2400 x 2400 dpi means you get outstanding fine-line detail and text with vivid images and smooth color transitions — even at speeds of up to 70 ppm. EFI servers with embedded PANTONE® technologies such as PANTONE® GOE and PANTONE® PLUS ensure the colors you want are the colors you get.

And a combination of Xerox® Emulsion Aggregation (EA) toner with ultra-low melt technology, +/- 1.5 mm front-to-back registration and Simple Image Quality Adjustment (SIQA) means you get consistent quality from your first print to your last.



* Idealliance, Fogra, and Adobe PDF Print Engine achieved with the optional EFI server

WORK SMARTER, NOT HARDER

Looming deadlines are the norm. Now, there's no reason to compromise. Adding a PrimeLink to your arsenal lets you upgrade your productivity in ways you wouldn't think possible.

Designed to promote multitasking and collaboration, it's customizable to suit your work style. The Xerox® Integrated Color Server comes standard. Or you can choose from one of three optional EFI servers for more capabilities and more volume. All you have to do is select the best fit based on your business applications and the level of automation and color accuracy you need.

The printer also has access to the Xerox App Gallery. With apps that connect to leading applications including Box®, Microsoft® OneDrive®, Google Drive™, Dropbox™ and Microsoft Office 365™, you can print and scan directly to and from the cloud, simplify workflows and automate complex tasks.

Plus, built-in mobile connectivity with @PrintByXerox lets your team stay on-task when they're on the go. With this feature, PrimeLink can securely accept print submissions from any email-enabled device — no extra software required.

It's all there with the touch of a button. Say yes to more, and Xerox® PrimeLink C9065/C9070 will help you deliver.

SERVE AND PROTECT

PrimeLink applies a strategic approach to security to keep your network and projects safe from prying eyes. Stop suspicious activity where it starts with our comprehensive approach to security:


- Multiple layers of security include data encryption, access controls, disk overwrite and industry certifications.
- Audit Log ensures an audit trail of operators' key events. These logs are imperative for Administrators/Key Operators to use for troubleshooting, resource optimization and security audits.
- Secure Print holds documents for release until you're ready to retrieve them.
- Secure Scanning includes password protection for PDFs and folders, as well as encryption for scanning to email.

FINISH STRONG

PrimeLink delivers media latitude and finishing options that are best-in-class and unparalleled in an entry-level device.

Print on specialty stocks and heavyweight stocks up to 350 gsm. Print up to 26" (660 mm) with the Extra Long Sheet (XLS) capability up to 220 gsm. And print long runs without refilling the paper tray using high volume feeding options.

Finishing options are professional-grade, easy to navigate and nearly endless. Enjoy options ranging from full-bleed trimmed booklets to punch, crease and fold.

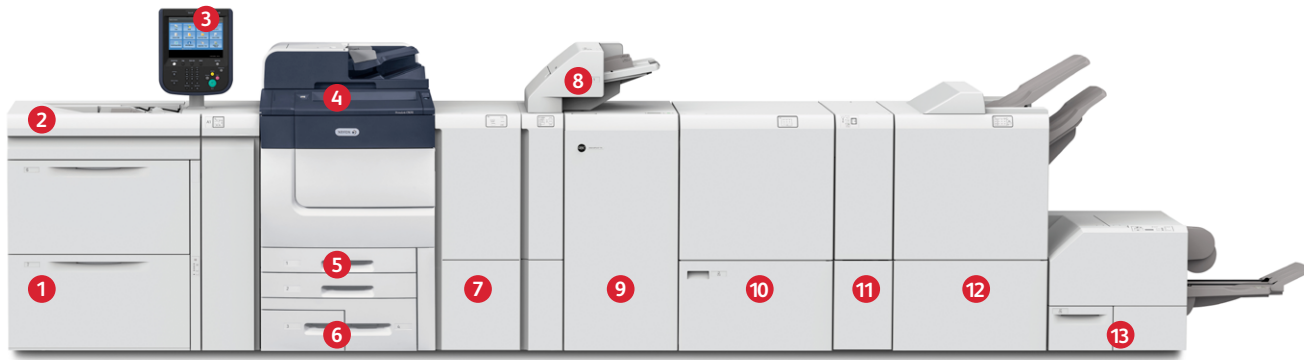

Xerox® PrimeLink® C9065/C9070 Printer

1 Two-Tray Oversized High Capacity Feeder:

Adds 4,000 sheets in sizes from 4 x 6 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 350 gsm). Up to 13 x 26 in. / 330 x 660mm via Tray 5 (up to 220 gsm).

2 Extra Long Sheet (XLS) Capability:

Print banners, book jackets, calendars and other applications up to 26 in. (660 mm) long, and up to 220 gsm via Tray 5 (Bypass).

3 Control Panel: An intuitive user interface makes it simple to access general print, copy, scan and fax functions, integrated color server, useful apps from the Xerox App Gallery, color controls, security features and much more.

4 Integrated Scanner: Single Pass Duplex Automatic Document Feeder scans up to 270 impressions per minute; 600 dots per inch color up to 11 x 17/A3. Scan to a variety of output options; desktop, USB, mailbox, FTP, SFTP, SMB and Job Flow multi-destination scanning.

5 Xerox® PrimeLink C9065/C9070 Printer:

Prints, copies, scans and faxes all while delivering stunning color image quality at a highly productive 65 ppm color and 70 ppm black-and-white (C9065) or 70 ppm color and 75 ppm black-and-white (C9070).

6 Five Internal Trays (Standard): Includes a 12 x 18 in./SRA3 tray and Tray 5 (Bypass) max weight up to 350 gsm and up to 26 in./ 660 mm sheet size.

7 Xerox® Interface Decurler Module:

Inline paper cooling and decurler unit improves throughput and efficiency, connecting Production Ready finishing modules, ensuring flat sheets for reliability and speed.

8 Xerox Inserter: Insert preprinted or blank media into printed documents with a tray capacity of 250 sheets, sheet sizes up to 13 x 19.2 in. (330 x 488 mm) and 350 gsm.

9 GBC® AdvancedPunch Pro™: Lets you create bound documents in-house by combining printing, punching and collating into one convenient step. Choose the punch to fit your needs.

10 Xerox® Crease and Two-sided Trimmer: Trims 6-25 mm from the head and foot of prints or booklets to produce an even edge and creases spine. Available with Production Ready Finishers.

11 Xerox® C/Z Folder: Produces Z-fold, C-Fold and Engineering Z-Fold.

12 Xerox® Production Ready Finisher Booklet Maker: Ensures consistent high-quality stapled sets for small or large documents with a variable-length stapler, single or dual stapling option and a 100 sheet capacity. Plus, creates stapled booklets up to 30 sheets or 120 imposed pages (uncoated), or 15 sheets or 60 imposed pages (coated).

13 Xerox® SquareFold® Trimmer Module: Enhances the power of the Production Ready Finisher with square fold of cover sheets and face trimming to produce booklets.

- One-Tray Oversized High Capacity Feeder with Storage Cabinet — Adds 2,000 sheets in sizes from 4 x 6 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 350 gsm). Up to 13 x 26 in. / 330 x 660 mm via Tray 5 (up to 220 gsm).
- Offset Catch Tray — 500-sheet stacking.
- Xerox® Business Ready Finisher — A lighter-duty option for finishing and stacking and staples up to 50 sheets uncoated/15 coated.
- Xerox® Business Ready Booklet Maker Finisher — Provides booklet making capability.
- Xerox® Production Ready Finisher — Produces superior quality finishing and stacking with a 500-sheet top tray and 3,000-sheet stacker tray and built-in bi-directional decurler.
- Xerox® Production Ready Finisher Plus — Provides same function as the Production Ready Finisher. Used to connect third-party inline finishing options.
- Xerox® Basic Punch — An option for punching 2/3, 2/4 and Swedish 4-hole on the Production Ready Finisher and Booklet Maker.
- Plockmatic Pro 50/35 Booklet Maker — Highest quality production booklets up to 200 pages (up to 50 sheets). Face trimming, square fold, rotate crease and bleed trim.
- Convenience Stapler — Staples up to 50 sheets of 20 lb./80 gsm media.
- Xerox® Tape Binder — Combines inline thermal tape binding with the speed, value and convenience of Production printing. Works with Xerox® Production Ready Finisher Plus.
- GBC® eWire™ — Combines printing, punching, collating and twin-loop binding into one integrated process. Runs inline with the GBC® AdvancedPunch™ Pro and the Xerox® Production Ready Finisher Plus.

ADDITIONAL FEEDING AND FINISHING OPTIONS NOT PICTURED

- One-Tray Xerox® High Capacity Feeder — Holds 2,000 sheets of 8.5 x 11 in. (A4) paper, 64–220 gsm.
- Banner Feed Guide — An option for the Tray 5 (Bypass)/MSI/OHCF that increases reliability when feeding XLS or 350 gsm media.

FINISHING APPLICATIONS



Sort and Collate



XLS



Tape Binder



Tri-Fold



Square Fold



Face Trim



Hole Punch



Booklet




Tabloid Z-Fold



GBC eWire



Z-Fold



2-Sided Trim



Basic Punch



Staple

Xerox® PrimeLink® C9065 and C9070 Printer

DEVICE SPECIFICATIONS		PRIMELINK C9065	PRIMELINK C9070
SIMPLEX SPEEDS	Color	Black-and-white	Color
8.5 x 11 in. / A4	Up to 65 ppm	Up to 70 ppm	Up to 70 ppm
11 x 17 in. / A3	Up to 33 ppm	Up to 35 ppm	Up to 35 ppm
12 x 18 in. / SRA3	Up to 29 ppm	Up to 30 ppm	Up to 30 ppm
AUTO DUPLEX SPEEDS	Color	Black-and-white	Color
8.5 x 11 in. / A4	Up to 65 ppm 2-sided 32 sheets per minute	Up to 70 ppm 2-sided 35 sheets per minute	Up to 70 ppm 2-sided 35 sheets per minute
11 x 17 in. / A3	Up to 32 ppm 2-sided 16 sheets per minute	Up to 35 ppm 2-sided 17 sheets per minute	Up to 35 ppm 2-sided 17 sheets per minute
Printer Dimensions	Height: 54.8 in. / 1,391.5 mm; Width: 62 in. / 1,574 mm; Depth: 31 in. / 787 mm		
Monthly Duty Cycle	Up to 300,000 pages (maximum volume capacity expected in any one month, not expected to be sustained on a regular basis)		
Average Monthly Print Volume (AMPV)	10,000 to 60,000 pages per month		
Paper Flexibility/Weights	Standard Paper Capacity: 3,260 sheets (Tray 1 & 2: 500 sheets, Tray 3: 870 sheets, Tray 4: 1,140 sheets, Tray 5 (Bypass): 250 sheets) Max Paper Capacity: 7,260 sheets (Tray 1 & 2: 500 sheets, Tray 3: 870 sheets, Tray 4: 1,140 sheets, Oversized High Capacity Tray 1 & 2: 4,000 sheets) Sizes: Tray 1: 5.5 x 8.5 in. to 12 x 18 in. / A5 to SRA3; Tray 2: 5.5 x 8.5 in. to 11 x 17 in. / A5 to A3; Tray 3: 7.25 x 10.5 in., 8.5 x 11 in. / B5, A4; Tray 4: 7.25 x 10.5 in., 8.5 x 11 in. / B5, A4		
Image Quality	Print Technology	Benchmark image quality with 2400 x 2400 dpi resolution with VCSEL ROS and EA Eco with ultra-low melt technology toner for a smooth, offset-like finish	
	Line Screens	150/200/300/600 dot screen, 200 line screen, stochastic and enhanced text and graphics	
	Registration	<ul style="list-style-type: none"> Advanced registration technology for tighter control Simple Image Quality Adjustment (SIQA) for de-skew, registration and density uniformity (available on all configurations) +/- 1.5 mm. Variation will occur based on paper size, tray, etc., 	
Print Features	<ul style="list-style-type: none"> Print, copy, fax and scan, including Scan to PC, USB or Email, and mobile printing Expansive media range lets you print everything from postcards to posters, both coated and uncoated stock, up to 350 gsm Xerox Extensible Interface Platform® (EIP) allows you to connect to third-party software solutions Inline finishing options offer a professional polish with banner printing, stapling, hole-punching, folding and booklet making for presentations, brochures, reports and newsletters Be secure with integrated security features such as IP filtering, image overwrite, secure print, encrypted Scan to Email, authentication and IPv6 support 		
Servers	Standard	Optional	
	<ul style="list-style-type: none"> Xerox® Integrated Color Server 	<ul style="list-style-type: none"> Xerox® EX-c C9065/C9070 Print Server Powered by Fiery® Xerox® EX-i C9065/C9070 Print Server Powered by Fiery® Xerox® EX C9065/C9070 Print Server Powered by Fiery® 	
Integrated Scanner	<ul style="list-style-type: none"> Single-pass Duplex Automatic Document Feeder Color or black-and-white scanner Scan to text searchable PDF, PDF/A, thumbnail preview, XPS®, PCL® 6, HP-GL2 (direct submission), TIFF, JPEG 250-sheet capacity 		
Optional Feeding	Optional High Capacity Feeder (HCF): 2,000 sheets; 7.25 x 10.5 in., 8.5 x 11 in. / 184.2 x 266.7 mm, 279.4 x 215.9 mm (B5, A4); 16 lb. bond to 60 lb. cover / 64 to 220 gsm (uncoated and coated) Optional Oversized High Capacity Feeder (OHCF): One-Tray OHCF: 2,000 sheets plus Storage Cabinet; Tray 6: 3.9 x 5.8 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 350 gsm) Tray 5: Up to 13 x 26 in. / 330 x 660 mm (up to 220 gsm). Two-Tray OHCF: 4,000 sheets; OHCF: Tray 6 and 7: 3.9 x 5.8 in. / 100 x 148 mm to 13 x 19.2 in. / 330 x 488 mm (up to 350 gsm) Tray 5: Up to 13 x 26 in. / 330 x 660 mm (up to 220 gsm).		
Optional Finishing	Business Ready Finisher: Offsetting Top Tray: 500-sheets 8.5 x 11 in. / A4 unstapled. Stacking Stapling Tray: 3,000 sheets unstapled or 100 sets (dual or 4-position staple) 11x17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4. Sizes: Stacking: 4 x 6 in. to 12 x 19.2 in. / A6 to SRA3, Stapling: 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3. Other: 5.5 x 8.5 in. / A5 output to top tray; punch and offset. Paper weights: Top Tray-16 lb. bond to 130 lb. cover / 60 to 350 gsm (coated and uncoated). Stacker Tray-16 lb. bond to 96 lb. cover / 60 to 256 gsm (coated and uncoated). Business Ready Finisher Booklet Maker Finisher: Offsetting Top Tray: 500-sheets 8.5 x 11 in. / A4 unstapled. Stacking Stapling Tray: 1,500 sheets unstapled or 200 sets (single position stapling or dual or 4-position staple) or 100 stapled sets of 11 x 17 in. / A3 / SRA3. 11x17 in., 8.5 x 14 in., A3 or 200 sets (single-position staple) 8.5 x 11 in. / A4. Sizes: Stacking: 4 x 6 in. to 12 x 19.2 in. / A6 to SRA3. Stapling: 7.25 x 10.5 in. to 11 x 17 in. / B5 to A3. Other: 5.5 x 8.5 in. / A5 output to top tray; punch and offset. Paper weights: Top Tray-16 lb. bond to 130 lb. cover / 60 to 350 gsm (coated and uncoated), Stacker Tray-16 lb. bond to 96 lb. cover / 60 to 256 gsm (coated and uncoated). Booklet Maker-16 lb. bond to 96 lb. cover / 60 to 256 gsm (uncoated, 106 to 220 gsm (coated)). Booklet Maker-Saddle-stitch 2 to 16 sheets (7 sheets at 106 to 176 gsm coated or 5 sheets at 177 to 220 gsm coated). Production Ready Finisher (requires Interface Decurler Module): Booklet Size: 100 sheets (90 gsm) uncoated, 35 sheets (90 gsm) coated. Paper Size: 7.2 x 5.7"/182 x 146mm to 11.7 x 17"/297 x 432mm. Max Weight: 350 gsm. Options: Punch, Inserter and C/Z Folder. Trays: Two output trays, 500-sheet top tray, 3,000-sheet stack tray of 5.83 x 5.75"/148 x 146mm to 13 x 19.2"/330 x 488mm. Production Ready Finisher Plus (requires Interface Decurler Module): Provides same function as the Production Ready Finisher with a 500-sheet top tray and 2,000-sheet stacker tray. Used to connect third-party inline finishing options. Includes PFIM Partner Finishing Interface Module. Production Ready Finisher with Booklet Maker (requires Interface Decurler Module): Booklet Size: 7.17 x 7.17"/182 x 182mm to 13 x 19.2"/330 x 488mm up to 256 gsm. Trays: 500-sheet top tray, 2,000-sheet stack tray, saddle-stitch booklet tray (up to 120 pages, 30 sheets/90 gsm uncoated, 15 sheets/106 gsm coated). Offset Catch Tray: 500-sheet stacking. Xerox® SquareFold® Trimmer Module: Face Trim: 120 pages (30 sheets). Compatibility: Production Ready Finisher, Booklet Maker, Crease and Two-Sided Trimmer. Xerox® C/Z Folder: Sheet Size: 8.5 x 11" (A4). Half-Z Fold Sheet Size: Larger stocks reducing to 8.5 x 11" (A4). Weight Range: 64 - 90 gsm. Compatibility: Production Ready Finisher, Booklet Maker. Xerox® Inserter: Capacity: 250 sheets. Capabilities: Trimming, punching, folding, stapling, stacking. Paper Size: 7.2 x 5.8" (182 x 148 mm) to 13 x 19.2" (330 x 488 mm). Max Weight: 350 gsm. Compatibility: Production Ready Finisher. Xerox® Crease/Two-sided Trimmer: Trim Range: 0.236" (6 mm) to 0.985" (25 mm). Paper Size: 7.7 x 8.3"/194 x 210 mm to 13 x 19.2"/330 x 488 mm. Max Weight: 350 gsm. Compatibility: Production Ready Finisher and Booklet Maker. Buffering Unit: Up to five customizable mountain or valley creases per sheet. Plockmatic Pro 50/35 Booklet Maker: Booklet Capacity: 200 pages (50 sheets). Capabilities: Face trimming, square fold, rotate crease and bleed trim. Paper Size: Up to 12.6 x 9" (320 x 228.6 mm). Max Weight: 300 gsm. Compatibility: Production Ready Finisher Plus. For more optional finishing refer to Product Explorer explore.xerox.com/Product.		
Xerox App Gallery	Go to xerox.com/AppGallery to learn how you can expand the capabilities of the PrimeLink C9065/C9070 and work in new ways with dedicated apps for business, education, healthcare and more.		

Configurations vary by geographical location.

For more information, go to xerox.com/PrimeLink.

© 2020 Xerox Corporation. All rights reserved. Xerox®, PrimeLink®, SquareFold® and Xerox Extensible Interface Platform® are trademarks of Xerox Corporation in the United States and/or other countries. The information in this brochure is subject to change without notice. 11/20 TSK-678 BR26905 PC9BR-01UD



800.575.1545

www.ImagingEssentials.com

